



Extendable Large Dovetail Jig

Instruction
Manual
Part # 3458



CAUTION:

Please read, understand, and follow all manufacturers instructions, guidelines and owners manuals that come with your power tools. Peachtree Woodworking Inc. and its subsidiaries assume no liability for accidents or injuries caused by improper use of this product.

Peachtree Extendable Dovetail System Instructions

Introduction

The Peachtree Extendable Dovetail system takes a simple approach to making beautiful thru-dovetail's, a hallmark of fine craftsmanship. The hardest part about cutting dovetails is marking and cutting the matching angles to one another. That's what makes this system so easy. We have done the math for you and milled the exact cuts that need to be made in this heavy duty and easy to use jig. The Peachtree Extendable Dovetail system works in conjunction with bearing guides on the shank of router bits instead of using those hard to center brass bushing guides. Because the bearing is already centered on the bit it makes setting up to cut the joint fast and easy. We have milled the template to match the bearing size so that the bit is perfectly centered and there is no slop, wear or no waste. Unlike other templates you have seen, our jig will work with two different thickness stock as well as two different widths. We have also added extension tabs to the jig, so you can make dovetail cuts as long as you need by attaching two Peachtree Dovetail Jigs together. This means the type of projects you can create are endless.

Lets get started making some joints..

But first - let's talk about safety.

Read and follow all safety instructions

Caution:

Please read, understand and follow all manufacturers instructions, guidelines and owners manuals that come with your power tools. Peachtree Woodworking Supply Inc. and its subsidiaries assume no liability for accidents or injuries caused by improper use of this product.


Safety Tips

Creating dovetails that look like they have been hand cut will add curb appeal or distinction to any of your projects. To get the best performance and results out of your dovetail jig, we recommend the following tips:

1. Always wear safety glasses, hearing protection and dress properly. No loose clothing, hair, draw strings or jewelry that might get caught in moving parts.
2. Keep work area clean. Messy work areas invite injuries.
3. Make deeper or larger cuts in multiple passes and NEVER use dull cutters. Forcing a deep cut in one
4. pass or using a dull cutter can result in injury. Inspect bits for loose parts, damage or chips in carbide.
5. Make sure router bit is properly installed in router and do not exceed the recommended rpm
6. Keep all safety guards in place.
7. Always unplug your tools before changing cutters
8. Secure you work. Always use at least two clamps to hold your stock to the jig. Make sure the clamps do not interfere with the cutters on the under side of the jig.
9. Make sure the jig is clean with no build up or debris for smooth operation.
10. Make sure the bearing on the cutter is spinning freely. If not spinning freely it may damage the jig. Keep bearing clean and well lubed with bearing lubrication.
11. Follow all manufacturer safety guidelines provided with you router.
12. Support longer stock properly so that it does not shift or change the position of the jig

15" Dovetail Package Contents:

1. 15" Aluminum Dovetail Jig
2. Straight Edge Bit
3. 7° Dovetail Bit
4. 3/8" Sleeve adaptor

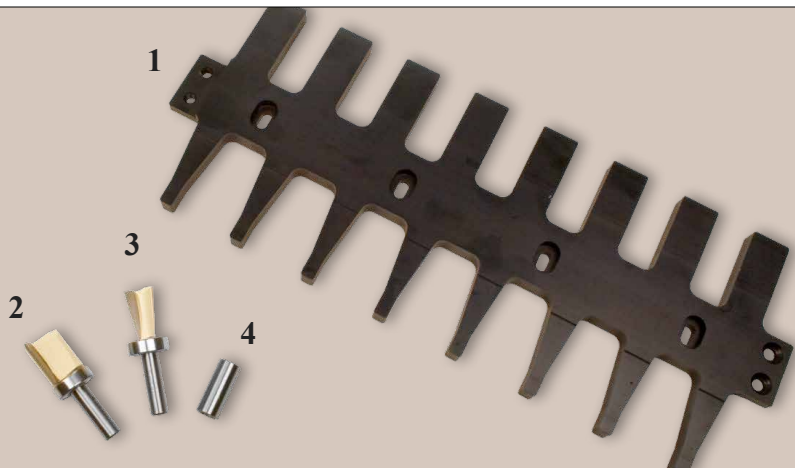


Mounting The Dovetail Jig

Prepare the mounting block (Not Included):

The 15" Dovetail Jig is mounted to a piece of stock (mounting block) that acts as a clamping surface for the work-piece. This will also prevent tear-out on the back side of your stock when you cut your joints. It is essential that the mounting block is accurately machined so it is 90° to the dovetail jig. It can be made from a solid block or laminated. The block needs to be 2-1/4" thick x 3-1/2" high x 18" long for use with standard router bits. For different size dovetails we recommend you change your mounting block to provide solid, continuous support when your bit passes through the back of your stock.

Mount the Jig to Mounting Block:

The first thing you need to do to start using your Peachtree Dovetail jig is mount the jig to the mounting block. The 15" Dovetail Jig has four elongated holes to attach the jig to the mounting block. There is a scribed line that runs across the underside and the top side of the dovetail jig on the pin side of the jig itself (**Fig. 1**). The line is used to line up the mounting block to the dovetail jig. Match this line to the top edge of the mounting block, it is important that the scribed line on the template jig and the stock are parallel. Drill through the four holes and insert the screws into the middle of the elongated holes. Tighten securely. The 15" Dovetail Jig can be used either in an upright position locked in a vise or inverted onto a router table when working with shorter stock.

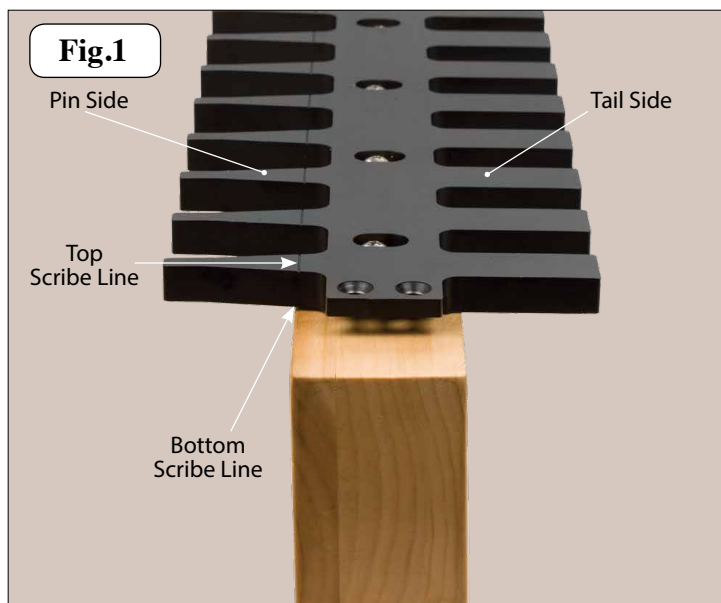

CAUTION

Before using the peachtree dovetail jig system, be sure that the 3/8" sleeve is against the bearing guide before installing either bit into the router. Failing to do so could result in damaging the dovetail jig, router bit or may cause personal injury.



Cut a Sample Joint

Before making a "live" cut on your project you will need to make a sample cut to test the accuracy of the fit. Follow instructions in the next section on how to make the tail cut and pin cut for your sample joint. When cutting a sample joint, it is important that the stock thickness is the same thickness as your project stock. The standard bit set that came with your jig is capable of cutting 3/4" to 1" stock. There is also an accessory bit set available for your dovetail jig. This bit set will do 1/2" to 3/4" stock.


Cutting The Tails

Making the Tail Cut:

Always start your projects by cutting the tail side first. The reason for this is, the tail cut side of the joint is not able to be adjusted. This makes the joint very accurate because we are working off of the angles of the dovetail router bit. It is the pin side of the joint that can be adjusted to fit the tail cut of the joint.

1. Secure stock to Jig

- A. Prepare the stock to be dovetailed by joining all four edges followed by cutting the ends square. With the Peachtree Dovetail Jig you can use one thickness stock for the tail cut and a different thickness stock for you pin cut.
- B. Clamp your stock to be dovetailed vertically into you workbench vise. **Fig 2**

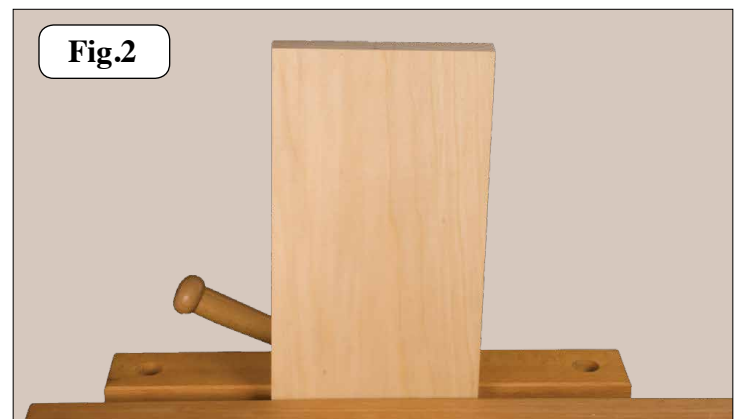

C. Place the mounted dovetail jig (tail side) on the end of stock. Position the jig, so that there are equal distances on either side of the jig. Make sure dovetail jig rest's flat on the tail stock and secure in place with F-clamps or C-clamps. To achieve an exact centered joint, mark the center of your stock, See **Fig. 3**, then measure $7/16''$ to one side of the center mark and scribe a second line with a pencil. Position the inside edge of one of the tail side openings exactly with the second scribed line See **Fig. 4**. Secure in place with F-clamps or C-clamps. This method will give equal spacing of your tails on either side of your stock.

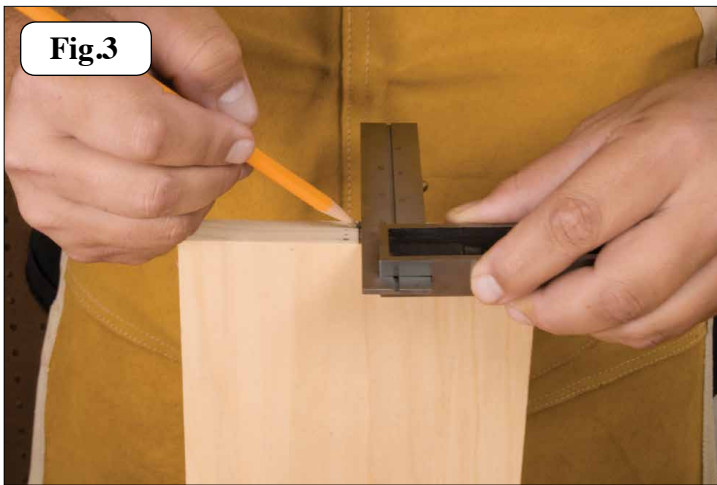


Fig.3

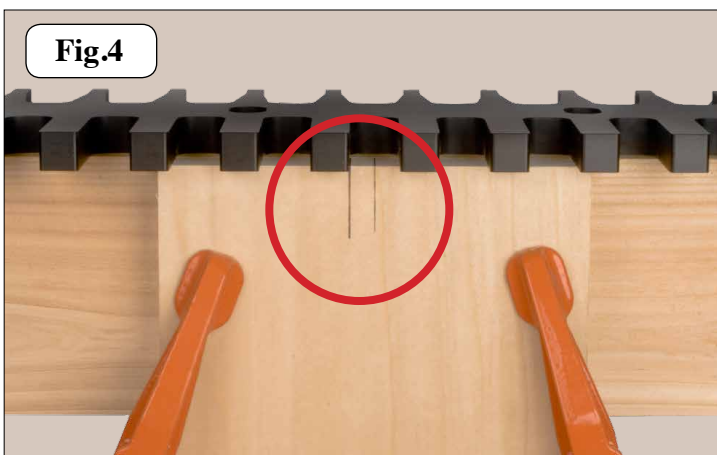


Fig.4

Caution:
 Make sure when clamping your stock to the jig your clamp heads are not in the path of the router bit.
 See **Fig.5**



Fig.5

E. Place the dovetail router bit with bearing guide into your router and secure router bit collet tightly. Adjust the base of your router for depth of cut by adding the thickness of the pin stock piece plus $1/2''$ for the thickness of the dovetail jig. If desired, add an additional $1/32''$ or more for sanding the edge perfectly flush after assembly of joint. Another way of setting your bit height is to place your pin side stock on top of the jig. Place the router with bit on top of stock, with bit hanging over edge between the fingers of the jig. Now lower the router bit until it touches the top of the tail stock and then secure router bit in place.
 See **Fig. 6**


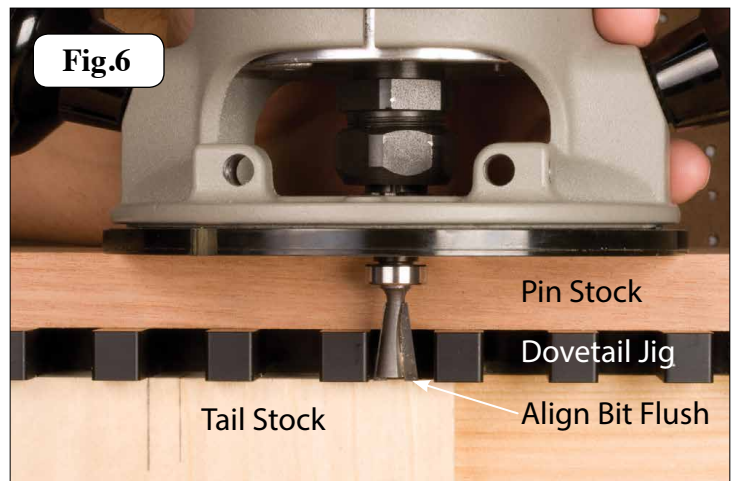


Fig.6

Caution:
 Make sure bearing contacts dovetail jig by at least $1/8''$ or more before starting cut. If bearing does not contact jig properly it may result in injury or damaging the dovetail jig. See **Fig.7**. In order cut dovetails into thinner stock, you must use optional router bits which are sold separately.

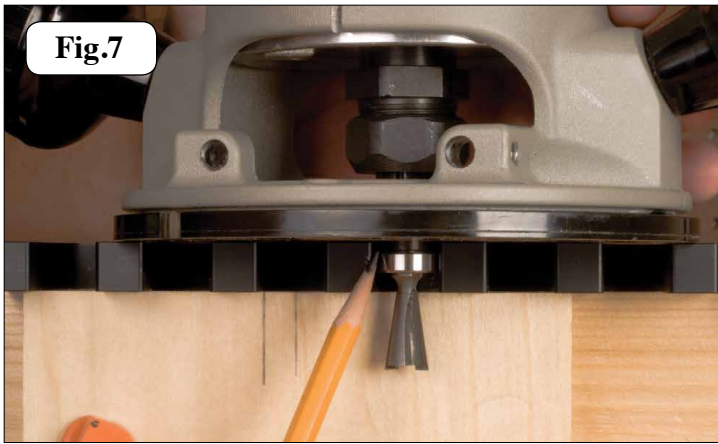

Caution:

To prevent damaging your dovetail jig while router is turned on - Do not tip the router, always keep the router flat on jig. Do not use the last opening on either end of the Dovetail Jig during the cutting process, doing so may tip the router (**Fig. 8b**) and cause damage to the jig or cause injury. Do not lift the router up between the fingers while router is on. Always be sure the router base is supported while making your cuts on the dovetail jig. When routing of joint is complete, turn router off and wait for bit to come to a complete stop before removing router off of the dovetail jig.

F. (Always wear eye protection) Cut your stock standing behind mounting block. See **Fig. 8a**. This will allow you to pull the router towards you while making the cut, giving you a smoother, more controllable cut. This also will keep the wood chips directed away from you. Place your router flat on top of the dovetail jig surface with the bit in between one of the openings. Be sure the cutter is not contacting the wood surface before turning your router on. Holding the router firmly, turn it on, and guide the bearing and router bit through each of the tail side openings, pulling the router all the way back to each of the tail slots, See **Fig. 8a**.




Shop Notes:

Do not force the router bit, or cut too fast, as this may result in tear-out, splintering of the stock or even loss of control. Moving the router too slow could result in burning of your stock. Feed the router bit into the stock with a smooth and controllable rate.

Completed Tail Cut:

Your completed tail cut stock should look like the photograph shown below in **Fig. 9**

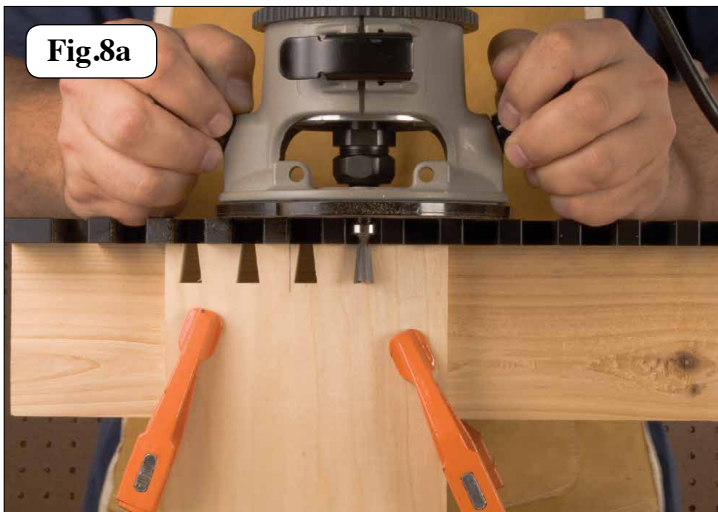

When Stock is Wider Than Dovetail Jig:

When the stock is wider than the jig, cut all of your tails, then scribe the outline of the last tail opening on the right side of the jig before un-clamping. Once scribed, un-clamp jig, slide the jig to the right, aligning the last tail opening on the left side of the jig with the scribed lines. Repeat this process for the entire width of your stock.

Cutting The Pins


Making the Pin Cut:

Pin cuts are always made after cutting the tails. The reason for this is, you will use the tail to cut to lay out the positioning of the pins of your joint.


1. Secure stock to Jig

A. Prepare the stock to be dovetailed by joining all four edges followed by cutting the ends square. With the Peachtree Dovetail Jig you can use one thickness stock for the pin cut and a different thickness stock for you tail cut.

B. Clamp your stock to be dovetailed vertically into you workbench vise. **Fig 10**

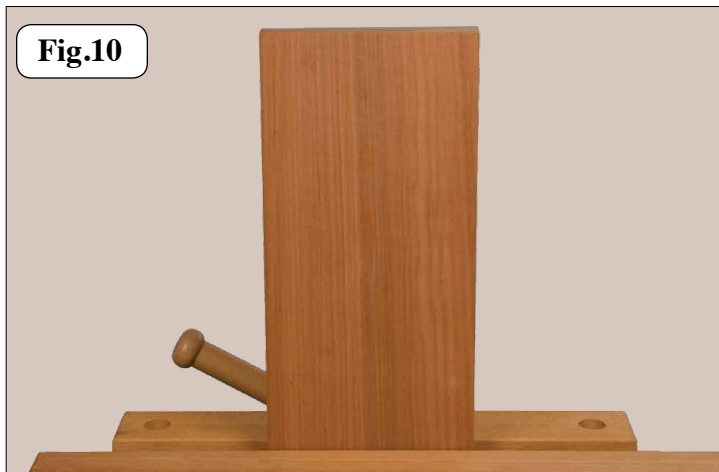

C. To mark the location of the pins you will use the tail stock piece you just cut as marking guide. Position the tail stock on top of the pin board in the correct right angle position See **Fig. 11** . Make sure all three edges line up flush with the pin board (piece to be cut). Using a utility knife, scribing knife or a fine tipped pencil mark the location of one dovetail opening on the end grain of the pin board.

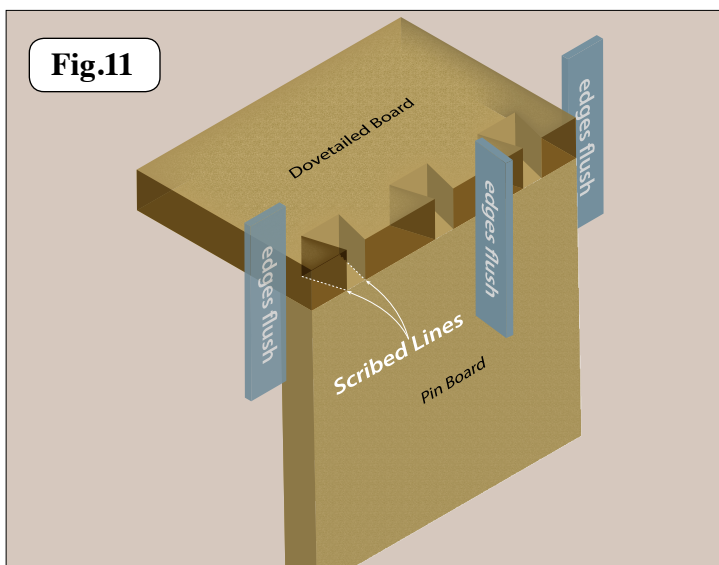

D. Place the mounted dovetail jig (pin side) on the end of stock. Position the jig, so that the two edges of one of the pins line up with the two scribed lines. Note: the angles that you marked with your scribing tool for your dovetail opening will match both side edges of one pin on your dovetail jig. See **Fig.12**. Make sure dovetail jig rest's flat on the pin stock and secure in place with F-clamps or C-clamps. You will be removing the stock that is exposed between the pin openings of the dovetail jig using the straight router bit.



Fig.12

Caution:


Make sure when clamping your stock to the jig your clamp heads are not in the path of the router bit.

See **Fig.13**



Fig.13

E. Place the straight router bit with bearing guide into your router and secure router bit collet tightly. Adjust the base of your router for depth of cut by adding the thickness of the tail stock piece plus 1/2" for the thickness of the dovetail jig. If desired, add an additional 1/32" or more for sanding the edge perfectly flush after assembly of joint. Another way of setting your bit height is to place your tail side stock on top of the jig. Place the router with bit on top of stock, with bit hanging over edge between the fingers of the jig. Now lower the router bit until it touches the top of the pin stock and then secure router bit in place. See **Fig. 14**

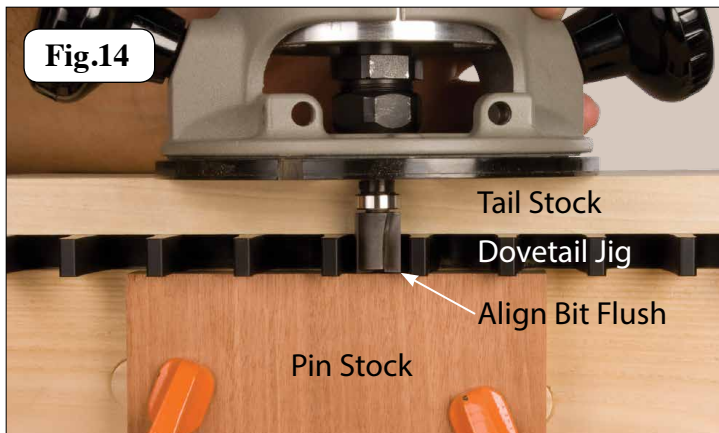

Caution:

Make sure bearing contacts dovetail jig by at least 1/8" or more before starting cut. If bearing does not contact jig properly it may result in injury or damaging the dovetail jig. See **Fig.15**. In order cut dovetails into thinner stock, you must use optional router bits which are sold separately.

Caution:

To prevent damaging your dovetail jig while router is turned on - Do not tip the router, always keep the router flat on jig. Do not lift the router up between the fingers while router is on. When routing of joint is complete, turn router off and wait for bit to come to a complete stop before removing router off of the dovetail jig. Do not force the router bit, or cut to fast, as this may result in tear-out, splintering of the stock or even loss of control. Moving the router to slow could result in burning of your stock. Feed the router bit into the stock with a smooth and controllable rate.



Completed Pin Cut:

Your completed pin cut stock should look like the photograph shown below in **Fig. 17**

F. (Always wear eye protection) Cut your stock standing behind mounting block. See **Fig. 16**. This will allow you to pull the router towards you while making the cut, giving you a smoother, more controllable cut. This also will keep the wood chips directed away from you. Place your router flat on top of the dovetail jig surface with the bit in between one of the openings. Be sure the cutter is not contacting the wood surface before turning your router on. Holding the router firmly, turn it on, start by taking very light pass across the face of your pin stock. This step prevents chipping or tear-out of the stock. Proceed to guide the bearing and router bit along the edge of each of the pin side openings of the dovetail jig. Pulling the router all the way back to each of the pin slots removing the stock down to the scribed lines, See **Fig.16** On wood that tends to easily chip, a thin light pass from the face of the stock to the back of the dovetail jig will help eliminate tear-out.



When Stock is Wider Than Dovetail Jig:

When the stock is wider than the jig, cut all of your pins, then scribe the outline of the last pin opening on the right side of the jig before un-clamping. Once scribed, un-clamp jig, slide the jig to the right, aligning the last pin opening on the left side of the jig with the scribed lines. Repeat this process for the entire width of you stock.


Assemble the Dovetail Joints:

Assemble the pin-board and the tail-board. The Joint should have a snug - sliding fit as shown in **Fig. 18**. If you have to force the joint together with a mallet, it may result in splitting the dovetailed sockets, as well as forcing the glue out of the joint. To loose of a fit, may produce wobbling and a weak dovetail joint. If you have added the extra 1/32" or more to your joint, it can now be cleaned up by sanding the joint flush after gluing. If satisfied with the fit of your dovetail joint - glue, clamp and finish your project. If the dovetails are in need of adjustment, this is done on the pin side of the dovetail jig (follow steps below). The tail side or of the joint remains the same.



If Joints Are To Loose:

You will need to make the joint tighter, by making the pins larger, lightly loosen the 4 screws that hold the dovetail jig to the mounting block, just enough to be able to tap the jig forward with a wooden mallet or scrap block of wood (do not use a metal hammer directly on jig as it may damage the dovetail jig). Tap the dovetail jig forward on the mounting block. The distance of this adjustment usually is made in .001" depending upon how loose the joint is. Start out by tapping the dovetail jig forward on the block .002" See **Fig. 19**. This means that each pin size is increased by .004" wider (.002" on each side of the pin = .004"). Make sure your adjustment remains parallel across the dovetail jig to the mounting block. Once adjusted, tighten the four screws - repeat cutting process with different piece of stock until you obtain the desired fit.

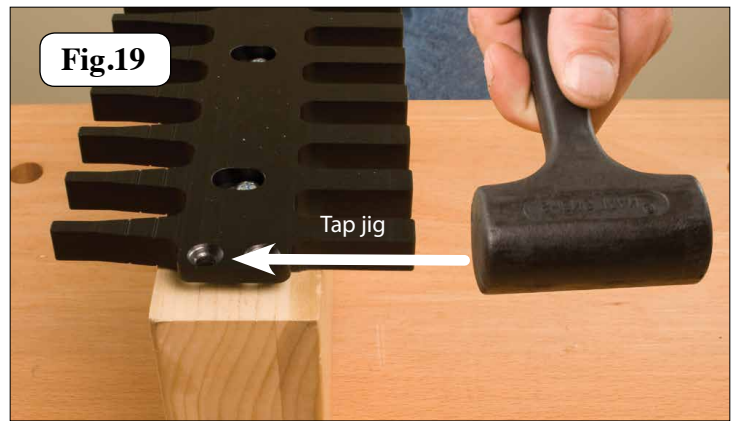


Shop Notes:

When making test cuts it is important that your test stock is exactly the same size thickness as your project stock. Each time you change the thickness of your stock, you must adjust the dovetail jig accordingly.

If joints are to tight:

You will need to make the joint looser by making the pins smaller, slightly loosen the 4 screws that hold the dovetail jig to the mounting block, just enough to be able to tap the jig backward with a wooden mallet or scrap block of wood (do not use a metal hammer directly on jig as it may damage the dovetail jig). Tap the dovetail jig backward on the mounting block. The distance of this adjustment usually is made in .001" depending upon how tight the joint is. Start out by tapping the dovetail jig backward on the block .002". See **Fig. 20**. This means that each pin size is decreased by .004" smaller (.002" on each side of the pin = .004"). Make sure your adjustment remains parallel across the dovetail jig to the mounting block. Once adjustment is made, tighten four screws and repeat cutting process with different piece of stock until you obtain desired fit.

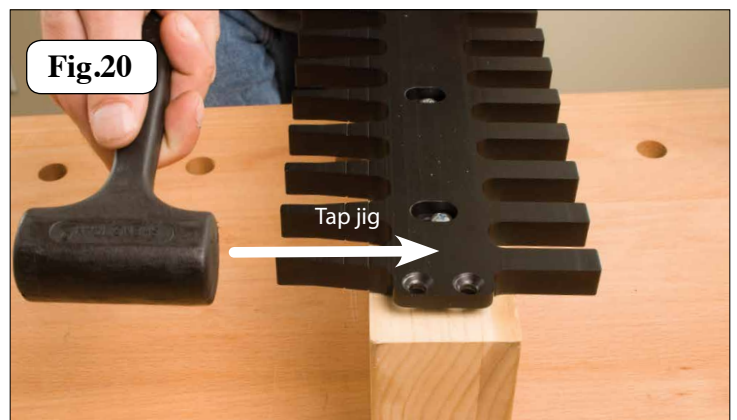

Shop Notes:

When making test cuts it is important that your test stock is exactly the same size thickness as your project stock. Each time you change the thickness of your stock, you must adjust the dovetail jig accordingly.

Various Dovetail Jig Uses

Using your dovetail jig on a router table:

To use your Peachtree dovetail jig on a router table, you will follow the exact same directions as detailed in this instruction manual, with an exception. You do not clamp your stock into your work bench vise. Once the stock is clamped into your jig you will then flip the jig with stock up-side down to be run on your router table. (See Fig. 21)

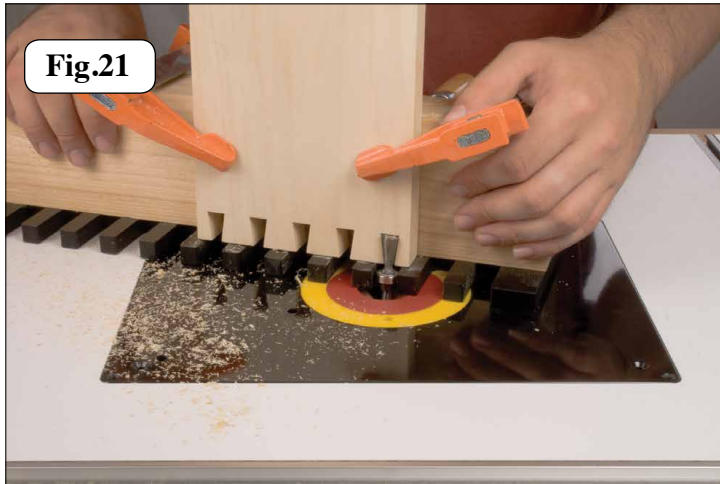


Fig.21

Thinner stock using “standard” bits:

You are able to do thinner stock using the bits that came with your set, leaving a larger amount of cut-off waste. Since the bearing of the bit must ride in the template by 1/8” or more, the standard bits will leave larger waste to be removed once the joint is complete. See (Fig. 22)

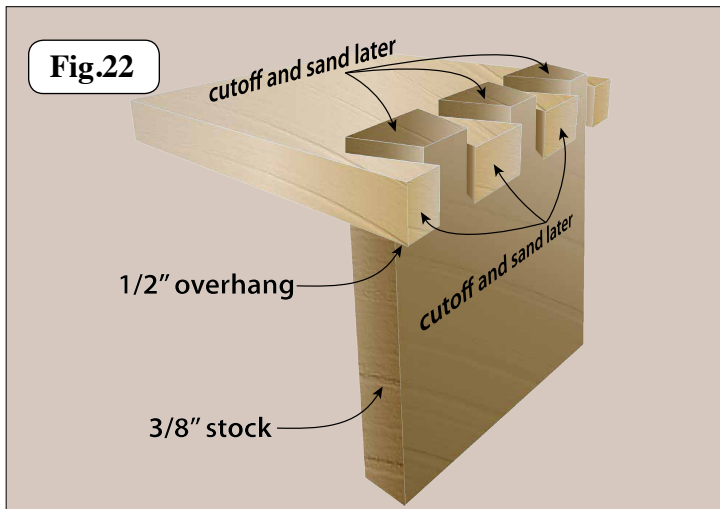


Fig.22

Caution:

Make sure bearing contacts dovetail jig by at least 1/8” or more before starting cut. If bearing does not contact jig properly it may result in injury or damaging the dovetail jig. See Fig.15. In order cut dovetails into thinner stock, you must use optional router bits which are sold separately.

Cutting stock two different thicknesses:

Your dovetail jig is capable of cutting different thickness stock within the same joint. We used the standard dovetail bit set that came with the dovetail jig to cut this joint. The only adjustment that needs to be made is for the height of the router bit for thickness stock we are cutting. The example below shows the tail cut in 3/4” stock and the pin cut made in 1” stock (See Fig. 23). Keep in mind, when setting up for this type of cut, you would set the bit up for the opposing stock thickness. Which means the height of the router bit to make the tail cut would be 1-1/2” and the pin cut router bit height would be 1-1/4”. We achieved this setting by adding 1/2” (for the dovetail jig thickness) to the opposing stock thickness.

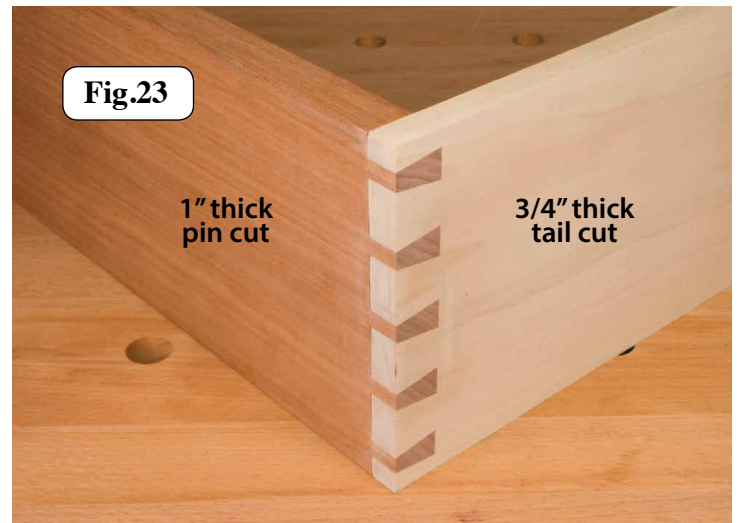


Fig.23

This joint shows 3/4” thick stock for the tails and 1” stock for the pins.

Shop Notes:

When cutting with the optional router bits, follow the all the instructions previously outlined in this manual. Make necessary adjustment for thinner stock pieces.

Cutting stock thickness; 1/2” to 3/4”:

We have designed two optional smaller router bits for your dovetail jig. These router bits are used for cutting 1/2” to 3/4” stock. In order to use these bits, you must either attach a spacer fence on you current mounting block or make a wider mounting block.




Item # 3461

Prepare The Mounting Block Thinner Stock:

In order to use the small router bit set for stock 1/2" to 3/4", you must make the pins smaller. This is achieved by adding a spacer (made out of MDF or solid wood) to the face of your mounting block (**Fig. 24**) not included. It is essential that the mounting block is accurately machined so it is 90° to the dovetail jig. It can be made from a solid block or laminated. For different size dovetails we recommend you change your mounting block to provide solid, continuous support when your bit passes through the back of your stock. To determine the thickness of your spacer, you will need to subtract the thickness of the stock from 1-1/4", see example's below.


	Subtract	Stock Thickness	Equals	Spacer Thickness
	1 1/4"	- 1/2"	=	3/4"
	1 1/4"	- 5/8"	=	5/8"
	1 1/4"	- 3/4"	=	1/2"

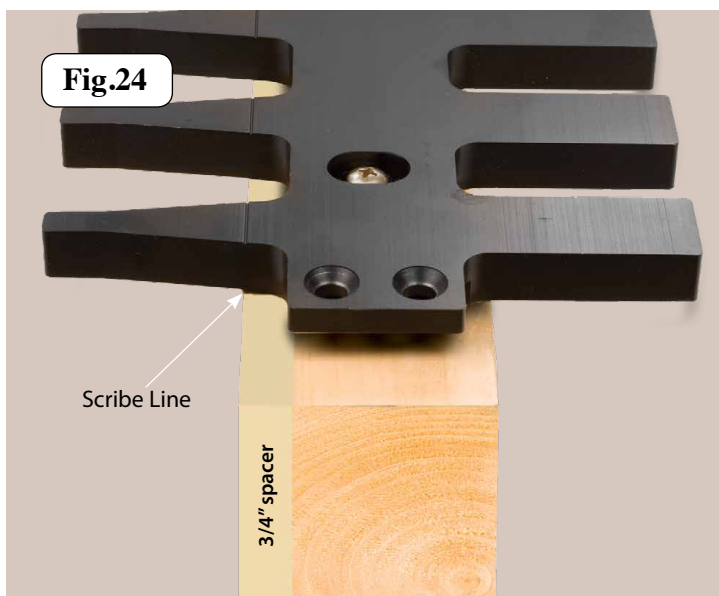

The example above shows the correct spacer attached to the original mounting block for cutting 1/2" stock using the small router bit set.

Shop Notes:

When cutting with the optional router bits, follow the all the instructions for cutting pins and tails previously outlined in this manual. To the adjust the tightness of the joint with the small router bit set follow previously outlined in figure 19 or 20 of this manual.

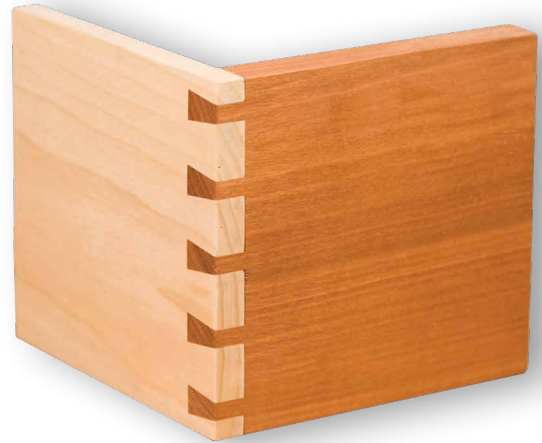

Creating Angled Dovetails

Angled Dovetails:

Cutting angled dovetails is done the same way you would do 90° dovetails. In this example we have a cut 22½° angle on our tail cut. Follow the instructions previously outlined in this manual to center the stock, then clamp your jig to the stock and make the cut. Make sure you position the jig to have at least 1/4" of stock on the outer tail. See (**Fig. 26**)



Completed Angled Tail Cut:

Your completed tail cut stock should look like the one shown below. See (Fig. 27)




Making the Pin Cut:

Follow the instructions previously outlined in this manual to align the stock to the jig, then clamp your jig to the stock and make the cut. See (Fig. 28)



Completed Angled Pin Cut:

Your completed tail cut stock should look like the one shown below. See (Fig. 29)

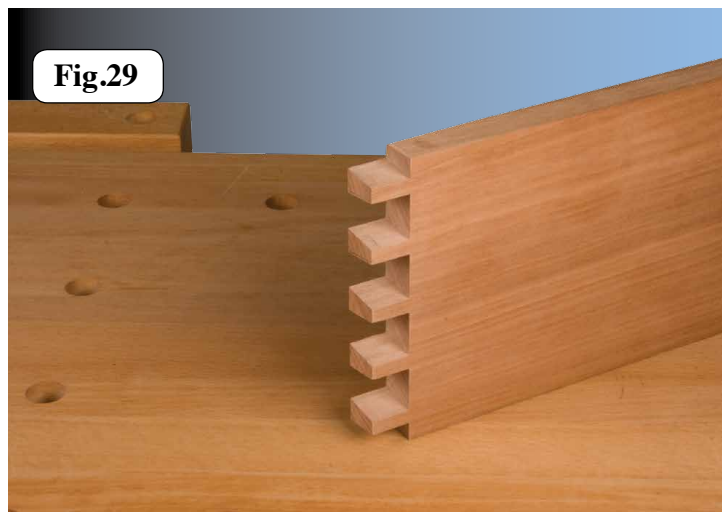

Assemble the Angled Dovetail Joints:

Assemble the pin-board and the tail-board. The Joint should have a snug - sliding fit as shown in Fig. 30. If you have to force the joint together with a mallet, it may result in splitting the dovetailed sockets, as well as forcing the glue out of the joint. To loose of a fit, may produce wobbling and a weak dovetail joint. If you have added the extra 1/32" or more to your joint, it can now be cleaned up by sanding the joint flush after gluing. If satisfied with the fit of your dovetail joint - glue, clamp and finish your project. If the dovetails are in need of adjustment, this is done on the pin side of the dovetail jig (refer previous instruction for joint adjustment).



Shop Notes:
You can use angled spacing blocks between your stock and the jig to cut virtually any type of angle from acute to obtuse. If you can clamp it to the jig you can dovetail it.

Creating Skip Spacing Joints

Skip Spacing Dovetail Joints:

One of the unique features of this system is, you can skip spaces between the tail cut and pin cut to vary the size of the joint. You can also make an endless amount of different widths by making one, cut an then sliding the jig to one side and make a second cut to vary the width of the joints. This following example will show you the skip spacing method.

Please Note:
When using this method you will mark the location of all the pins on the opposing stock.

Cutting The Tail:

We will be cutting every other tail cut on the jig. Follow the instructions previously outlined in this manual to center the stock, then clamp your jig to the stock and make every other tail cut. See (Fig. 31)

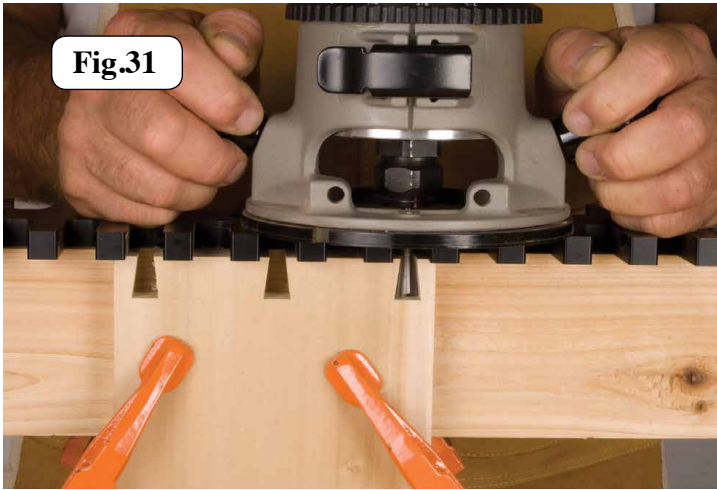


Fig.31

Completed Skip Spacing Of Tail Cut:

Your completed tail cut stock should look like the one shown below. See (Fig. 32)



Fig.32

Making The Pin Cut:

Pin cuts are always made after cutting the tails. The reason for this is, you will use the tail cuts to layout the positioning of the pins of your joint. You will follow the instructions previously outlined in this manual to align the stock to the jig with one exception; you must mark all of the pin locations on the stock to be cut.

Making Pin Cut Locations:

To mark the location of the pins you will use the tail stock piece you just cut as marking guide. Position the tail stock on top of the pin board in the correct right angle position See Fig. 33 . Make sure all three edges line up flush with the pin board (piece to be cut). Using a utility knife, scribing knife or a fine tipped pencil mark the location of ALL dovetail openings on the end grain of the pin board.

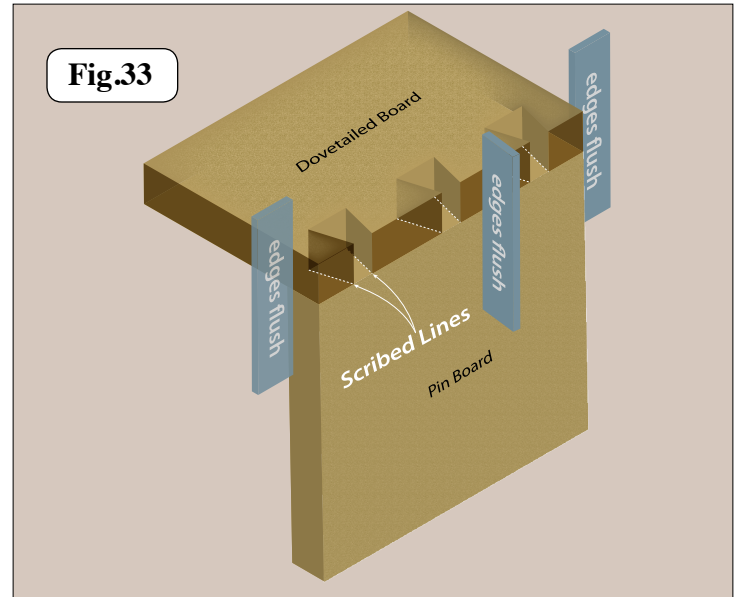


Fig.33

Marking Stock to be Removed:


Once you have marked the locations of your pins, use a magic marker or pencil to mark the stock to be removed between the pins. See (Fig. 34)



Fig.34


Stock removal of pin cuts:

Follow the instructions previously outlined in this manual to align the stock to the jig for the pin cut, then clamp your jig to the stock, set your bit height and make the cut. The first pass you will remove the stock in every pin cut opening. Your completed pin cut should look like **Fig. 35**. Take note, the pins that still have the magic marker on them need to be removed. You can use your band saw or a hand saw to remove them, or follow instructions below on how to use your dovetail jig to remove the excess pin material.

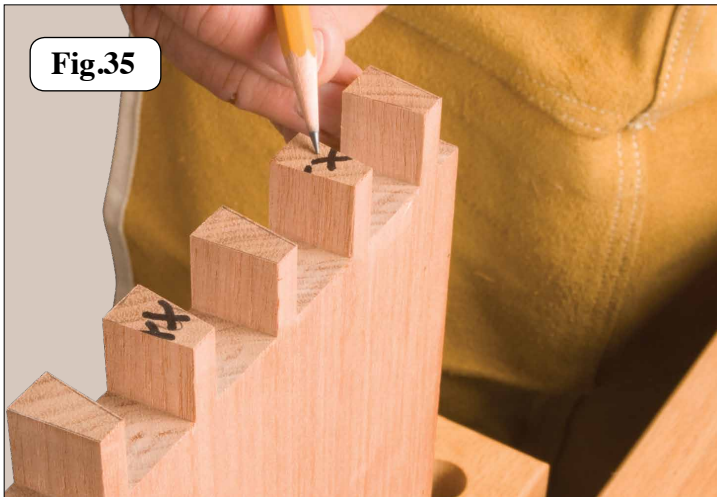

Removing Excess Pins:

Slide the jig to the Left and align the jig so that the back edge of the fingers rest on part of the pins See (**Fig. 36**), then clamp your jig to the stock. Note that we will be removing the stock that still has the markings on it.

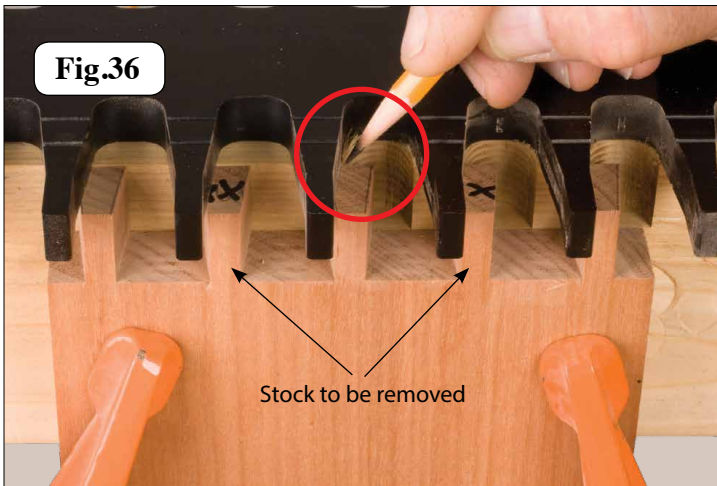


Make The Cut:

When making the cut, be sure to only remove the stock that has been marked. See (**Fig. 37**)




After making the cut, remove the jig - and your stock should look like this, See (**Fig. 38**). Note, there will be a small piece of the pin left that needs to be removed.

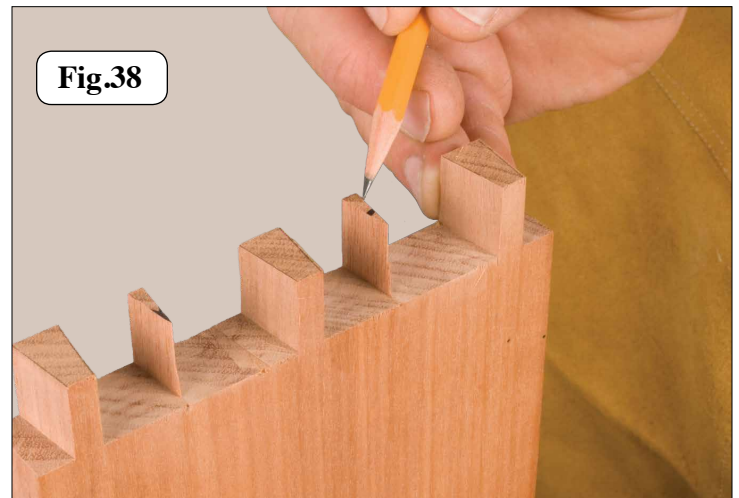

Removing Excess Pins:

Slide the jig to the Right and align the jig so the back edge of the fingers rest on part of the pins See (**Fig. 39**), then clamp your jig to the stock. Note that we will be removing the stock that still has the markings on it.

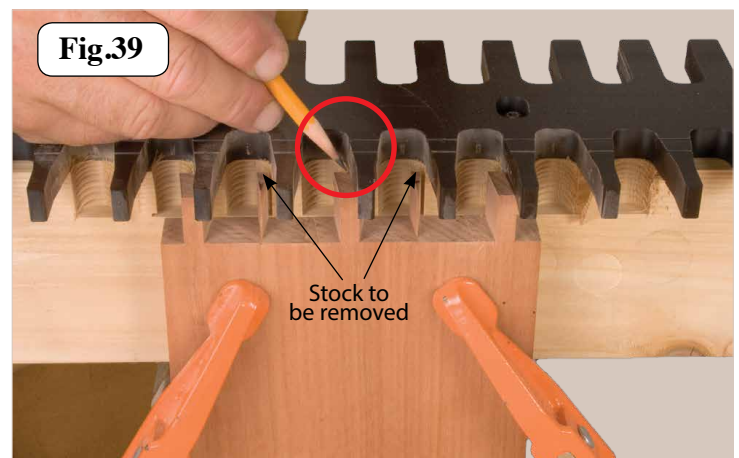

Shop Notes:

The Dovetail jig must rest flat on part of the pins to maintain the correct depth of cut, which will provide a stable work surface.

Make The Cut:

When making the cut, be sure to only remove the stock that has been marked. See (Fig. 40)



Shop Notes:

The Dovetail jig must rest flat on part of the pins to maintain the correct depth of cut, which will provide a stable work surface.

Completed Skip Spacing of Pin Cut:

Your completed tail cut stock should look like the one shown below. See (Fig. 41)



Assemble the Skip Spacing Joint:

Assemble the pin-board and the tail-board. The Joint should have a snug - sliding fit as shown in Fig. 42. If you have to force the joint together with a mallet, it may result in splitting the dovetailed sockets, as well as forcing the glue out of the joint. To loose of a fit, may produce wobbling and a weak dovetail joint. If you have added the extra 1/32" or more to your joint, it can now be cleaned up by sanding the joint flush after gluing. If satisfied with the fit of your dovetail joint - glue, clamp and finish your project. If the dovetails are in need of adjustment, this is done on the pin side of the dovetail jig (refer previous instruction for joint adjustment).



This method of skip spacing has an endless amount of possibilities when making your projects. It is up to you as to which socket to skip. You can cut one, skip one, cut one, skip one, or cut two, skip one, cut two - simply mix it up. You will also use this same basic principal to slide the jig one side to make wider pins and tails.

Shop Notes:

When using either method of skip spacing or slide spacing, the jig must rest flat on part of the pins to maintain the correct depth, which will provide a stable work surface.

Extending Your Dovetail Jig

Overlapping the Tabs

The Peachtree Dovetail Jig has tabs on both ends of the jig. The tabs allow you to secure two or more Peachtree Dovetail Jigs together. Take 2 Peachtree Extendable Dovetail Jigs and overlap the tabs (**Fig. 43**). Install the two machine screws, but do not completely tighten. Next, Place the extended jig assembly up against a straight edge or ruler and make sure the jig is sitting flush up against it. Check for any gaps between the jig and the straight edge / ruler. Once the jig is flat up against, tighten the two machine screws firmly (**Fig. 44**).

Fig.43





Fig.44

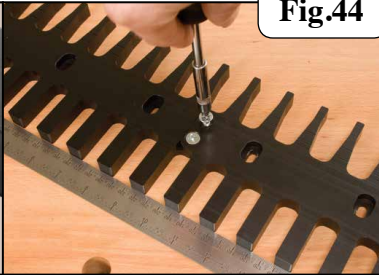

Mounting The Extended Jig

Mounting the extended jig works the same way as mounting a single jig. The only difference is the length of the block. When making the block, follow the instructions detailed in the beginning of this instruction booklet on page 3 (Prepare the Mounting Block / Mount the Jig to the Mounting Block, Fig. 1), but make the length of the block at least 2½” longer than the jig on each end.

Micro-adjust Your Jig

Installing the Micro-adjust Assemblies

The Micro-adjust assemblies (sold separately - part #3444) fit neatly on to the tabs of the dovetail jig tabs with two machine screws. Before the Micro-adjust assemblies can be installed, you must first have your dovetail jig mounted to the mounting block. When mounting the jig, follow the instructions on page 3 (Mount the Jig to the Mounting Block, Fig. 1). Make sure the screws that secure the dovetail jig to the mounting block are only partially tightened (**Fig. 45**) to allow for the installation of the Microadjuster.


Fig.45



Note: For proper fit of the Micro-adjust assemblies, the mounting block must extend at least 2½” longer than jig on each end.

Slide the Micro-adjust assemblies under the tabs and align with the pre-drilled holes. Secure the assemblies with the machine screws. Next, align the dovetail jig and the mounting block to the inner scribe line on the jig. Secure the “L” bracket on the Micro-adjust to the mounting block with 2 wood screws. Make sure there is enough space between the “L” bracket and the edge of the mounting block to prevent any splitting of the wood (**Fig. 46**). Once the Micro-adjust assemblies are secured to the jig and mounting block, tighten the screws that hold the dovetail jig to the mounting block before making your first test cut.


Fig.46

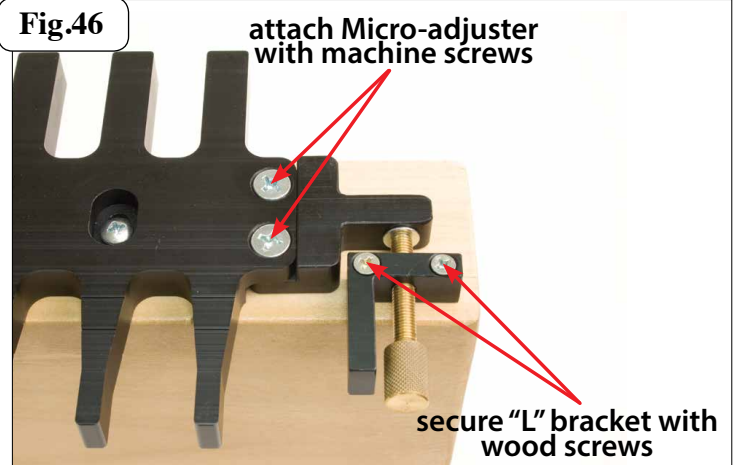

Using the Micro-adjust


To make adjustments with the Micro-adjust assemblies, slightly loosen the screws that hold the dovetail jig to the mounting block. Next, turn the knob(s) on the Micro-adjust assemblies clockwise /counter clockwise to move the jig in and out until you find your mark (**Fig. 47**). Refer back to page 7 (figures 19 and 20) for details on properly making adjustments to the fit of your dovetail joint. Once the jig is correctly adjusted, be sure to tighten the screws that hold the dovetail jig to the mounting block before making another test cut.

Fig.47

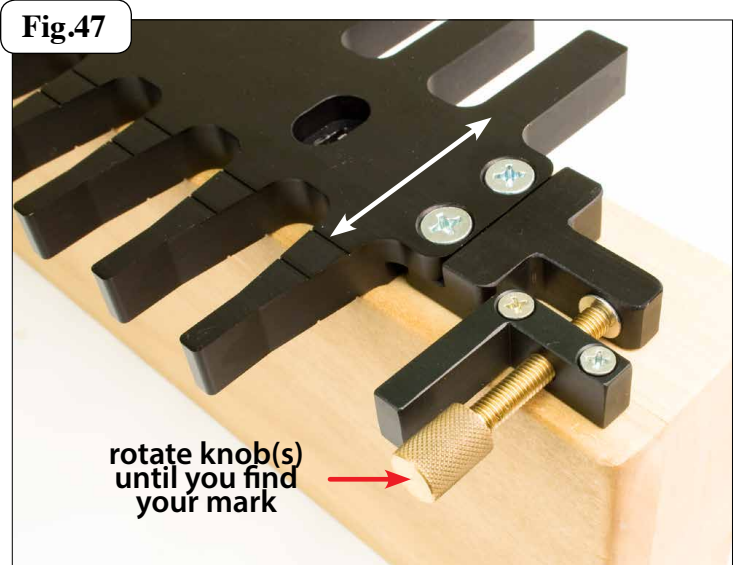



Peachtree Dovetail Jig

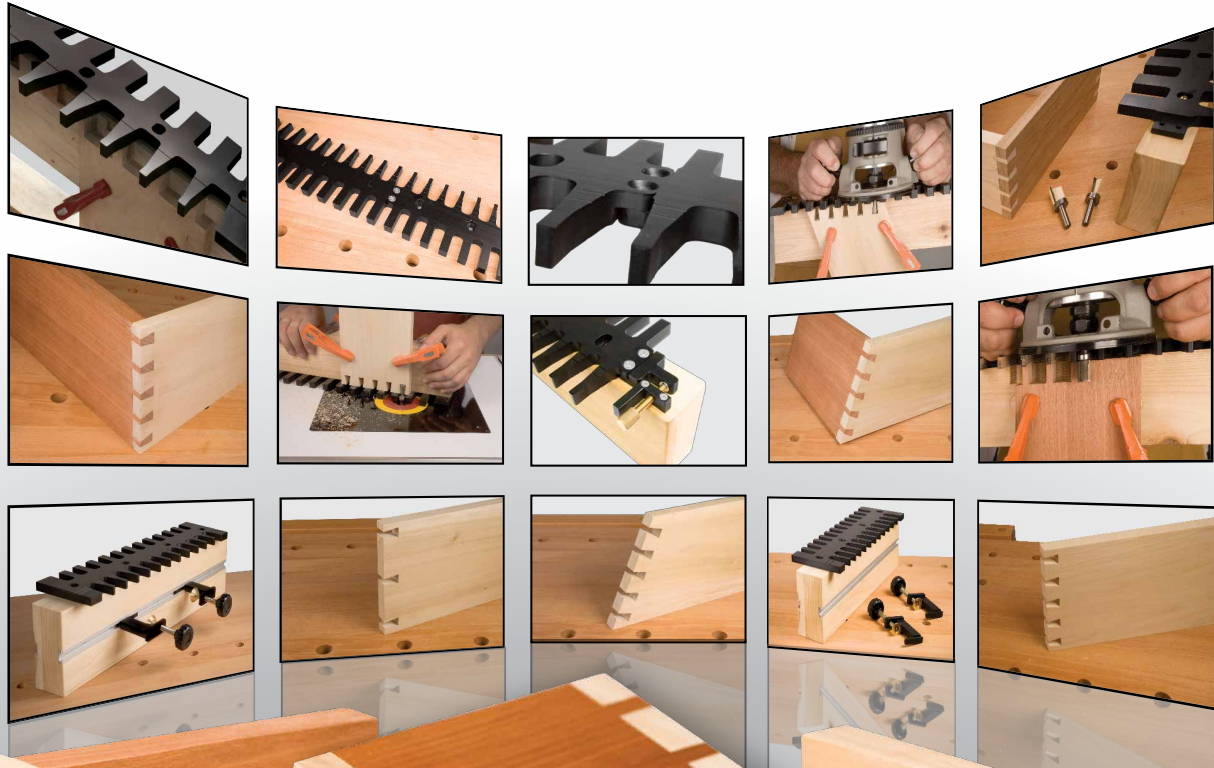

The Peachtree Dovetail Jig is one of the most versatile jigs available. In this manual we have outlined several different types of joints as well as thickness stock that can be made. The possibilities that can be applied are virtually endless. Thank you for your purchase and we hope you enjoy your brand new Peachtree Dovetail Jig!